

### IZELCRYL 30B70 3 %OH

#### STARTING PAINT FORMULATION

COMPONENT	AMOUNT %
IZELCRYL 30B70	43
DISPERSION AGENT	0,5
ANTI COLLAPSE	0,3
CALCITE	35
CARBON BLACK	1,5
SOLVENT	19,7

\*In paint formulation, resin solid rate is between 30-35% and paint solid ratio is between 65-70%.

#### PAINT AND VARNISH PROPERTIES

TEST	VARNISH	PAINT
Drying(minute, 20-23°C)	>24	>24
Hard Drying(hour, 20-23°C)	>24	>24
Pot life( hour, 20-23°C)	4	5
Gloss(60°, 20-23°C)	90	81
Pendulum Hardness(1-5 day/counts ,20-23°C)	35p-78p	47p-98p
*Yellowing Resistance(20-23°C)	0	-
*Cross Cut(GAL/AL/SHT)	0\0\0	0\0\0
*Impact Strength(5N/1000g)( GAL/AL/SH)	1\1\1	1\1\1
*Conical Bend Test(20-23°C)(GAL/AL/SHT)	1\1\1	1\1\1
**Abrasion Test(1000 cycle/500 gr)	0,184	0,241

(\*)Marked areas are rated as 0 best and 5 worst.

(\*\*) Taber Abrasion Test performed according to the mass method

TaberWear Index = ( F<sub>total</sub> x T ) / n F<sub>total</sub> = A<sub>first</sub> – B<sub>End</sub> n= cycle T = mass loss at an average of 1000 cycle

Galvanized(Gal),Sheet(SHT),Aluminum(AL)



Figure1. Aluminum surface impact test



Figure 2. Galvanized surface impact test



Figure 3. Sheet metal impact test



Figure 4. Aluminum surface adhesion test



Figure 5. Galvanized surface adhesion test



Figure 6. Sheet metal surface adhesion test

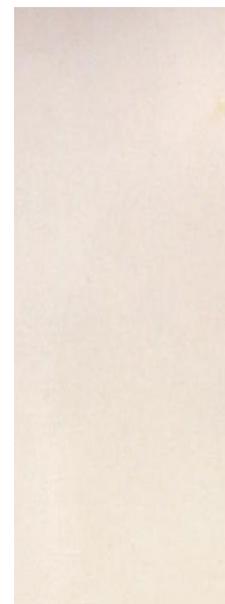


Figure 7. Yellowing resistance

**Note:** Experiments were carried out under Izel Kimya laboratory conditions aimed to give information about the product features. Results may vary according to the user and application condition